


## Gizmo Solar Wall Light Lantern

GIZMO SOLAR WALL LIGHT LANTERN  
0054040



### Product features

- Outdoor solar wall light in vintage design and black finish
- Integrated PIR sensor and daylight sensors
- Automatic light management - light up automatically when it gets dark after detecting any motion
- Easy installation - no direct mains wiring or connection required
- High lumen output - 345lm
- Long rated lifetime - 20,000 hours
- ON/OFF switch
- Robust construction - ABS housing and aluminium mounting bracket
- Perfect for porch, garage, sheds, outhouses, outdoor office, garden fence, gate lighting
- Colour temperature - Cool White 4000K
- Fixing kit included
- Operating temperature: -10°C to 40°C

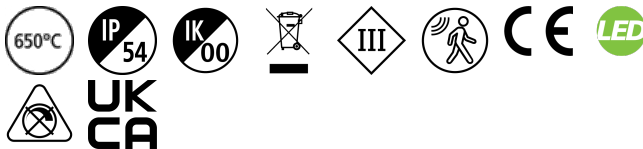

### NOTES

undefined

### PRODUCT OVERVIEW

Product name	GIZMO SOLAR WALL LIGHT LANTERN
Technology	LED
Cap/Base	N/A
Housing	ABS Plastic
Mount	Wall surface mounted
General application	Residential & Consumer
ETIM Class	N/A
Warranty	3 years
Fixture luminous flux (lm)	345
Luminaire efficacy (lm/W)	77
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Electrical protection	Class III
Control gear type	LED driver constant current
Dimmable	No
Housing colour	Black
IP rating	IP54

## Gizmo Solar Wall Light Lantern

*GIZMO SOLAR WALL LIGHT LANTERN*  
0054040

IK rating	IK00
Product EAN number	5410288540405
Dimming method	N/A
Light source included	INTEGRATED LED

### DATA TABLE

#### General data

Product name	GIZMO SOLAR WALL LIGHT LANTERN
Technology	LED
Cap/Base	N/A
Housing	ABS Plastic
Mount	Wall surface mounted
General application	Residential & Consumer
Operating temperature range (°C)	-10°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	N/A
Warranty	3 years

#### Optical data

Fixture luminous flux (lm)	345
Luminaire efficacy (lm/W)	77
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Distribution type	None
Photobiological Risk Group	RG1

#### Electrical data

Mains voltage (V)	5V
Electrical protection	Class III
Control gear type	LED driver constant current
Dimmable	No
Drive current (mA)	1300
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	N/A

#### Lifetime data

Lifespan L70 B50	20000
------------------	-------

#### Physical data

Housing colour	Black
IP rating	IP54
IK rating	IK00
Diffuser finish	Transparent
Diffuser material	Other
Reflector finish	None

## Gizmo Solar Wall Light Lantern

*GIZMO SOLAR WALL LIGHT LANTERN*  
0054040

Nominal Product Length (mm)	203
Nominal Product Width (mm)	182
Nominal Product Height (mm)	340
Weight (kg)	0.982

### Packaging

Single packaging type	Carton
Product EAN number	5410288540405
Packaging single length / height (cm)	24.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	35.0
DUN14 (outer)	15410288540402
Units per outer package	6
Packaging outer length / height (cm)	62.3
Packaging outer width (cm)	50.3
Packaging outer depth (cm)	37.6

### Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

## TECHNICAL DRAWINGS

