




NEW


P-QUADRO
BACKLIGHT

NEW
P-QUADRO
BACKLIGHT


30 X 120



SOURCE		OUTPUT				
40 W	5.190 lm	4.110 lm	CRI 80	4000K	PQAB-421240	45,50 €
			CRI 90	4000K	PQAB90-421240 NEW	52,50 €



60 X 60




SOURCE		OUTPUT				
40 W	5.190 lm	4.110 lm	CRI 80	3000K	PQAB-426030 NEW	38,00 €
				4000K	PQAB-426040	
				6000K	PQAB-426060 NEW	
	4.300 lm	3.600 lm	CRI 90	4000K	PQAB90-426040	48,00 €



SOURCE		OUTPUT		PMMA DIFFUSER		
40 W	5.190 lm	4.110 lm	Prismatic ■	4000K	PQABUN-426040	36,00 €
			Opal □	4000K	PQABN-426040 NEW	26,50 €



EXPLODED VIEW

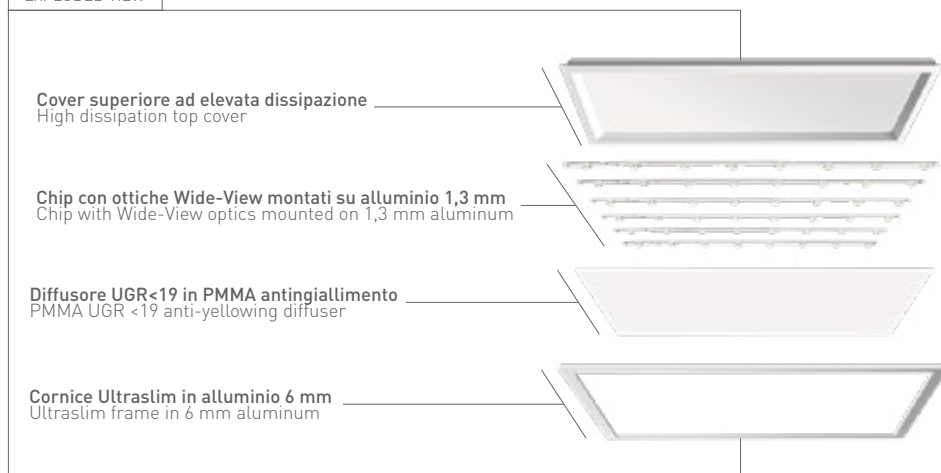

OPTIONAL PAG. 44-47

ALIMENTATORI E ACCESSORI
POWER SUPPLIES AND ACCESSORIES

COMPLIANCE

Pannelli da incasso a controsoffitto con tecnologia Backlight: l'impianto LED è installato sul retro del diffusore garantendo una migliore omogeneità luminosa.

Recessed ceiling panels with Backlight technology: the LED system is installed on the back of the diffuser ensuring better light uniformity.

EMC DIRECTIVE 2014/30/EU | EN 55015:2013/A1:2015 | EN 61547:2009 | EN 61000 3-2:2014 | EN 61000 3-3:2013
LVD DIRECTIVE 2014/35/EU | EN 60598-1:2015+A1:2018 | EN 60598 2-2:2012 | EN 62471:2008 | EN 62493:2015
ROHS DIRECTIVE 2011/65/CE | IEC 62311-5:2013 | IEC 62321-7-1:2015 | IEC 62321-7-2:2017 | IEC 62321-4:2017 | IEC 62321-6:2015 | IEC 62321-8:2017