


ACCESSORIES

CONTROLLER

TOUCH REMOTE RF



OUTPUT	BATTERY		
RF [2.4 GHz]	1 x CR2032	CTLRF	41,00 €


IP20 30 m 0-100% 5
 MAX DISTANCE TOUCH SLIDE MAGNETIC YEARS

TECHNICAL NOTES

TELECOMANDO RF TOUCH SLIDE CON SUPPORTO A PARETE MAGNETICO
 RF TOUCH SLIDE REMOTE CONTROL WITH MAGNETIC WALL SUPPORT



DIMMER SINGLE COLOR



OUTPUT	PROTOCOL		
SIGNAL 0/1-10 V (20 mA)	0/1-10 V + PUSH	DIM-010	50,50 €


IP20 100-240 V 0/1-10 V + PUSH-DIM 256 5
 INPUT / OUTPUT V. STEP 0-100% YEARS

TECHNICAL NOTES

MONTAGGIO TIPICO A PARETE CON SCATOLA DI GIUNZIONE
 TYPICAL WALL MOUNT WITH JUNCTION BOX




WIRING DIAGRAMS

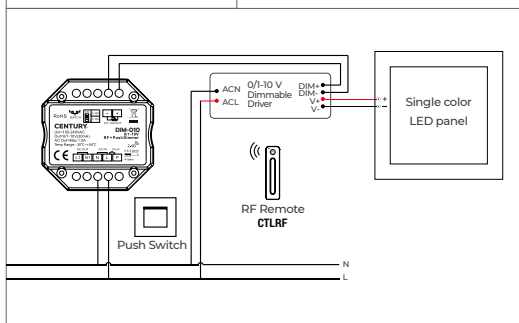


DIMMER

0-10V Dimmer




1-10V Dimmer



Selezionare 0-10V o 1-10V in base al driver LED dimmerabile
 Select 0-10V or 1-10V according to your dimmable LED driver

DAYLIGHT SENSOR



COMPATIBLE WITH

Driver LIFUD 1-10 V DRIMPQ42	SENSDL1-10	66,00 €
------------------------------	-------------------	---------

IP20 360° DAYLIGHT SENSOR 1-10V

TECHNICAL NOTES

IL SENSORE RILEVA LA LUCE NATURALE PRESENTE NELLA STANZA E, REGOLANDO IL FLUSSO LUMINOSO, MANTIENE COSTANTE L'ILLUMINAMENTO
 DAYLIGHT SENSOR DETECTS THE NATURAL LIGHT PRESENT IN THE ROOM AND, BY REGULATING THE LUMINOUS FLUX, KEEPS THE ILLUMINANCE CONSTANT

