


SINKRO

Faretto da incasso lineare antiriflesso con struttura in alluminio pressofuso, finitura con bordo bianco e interno nero lucido.

Anti-glare linear recessed spotlight with die-cast aluminum structure, finish with white border and glossy black interior.



technical information **SINKRO**



Materiale
alluminio pressofuso

Colore
bordo bianco e
interno nero lucido

Temperatura colore
4000K


Driver
incluso

Material
die cast aluminum

Colour
white and glossy
black inside

Colour temperature
4000K


Driver
included

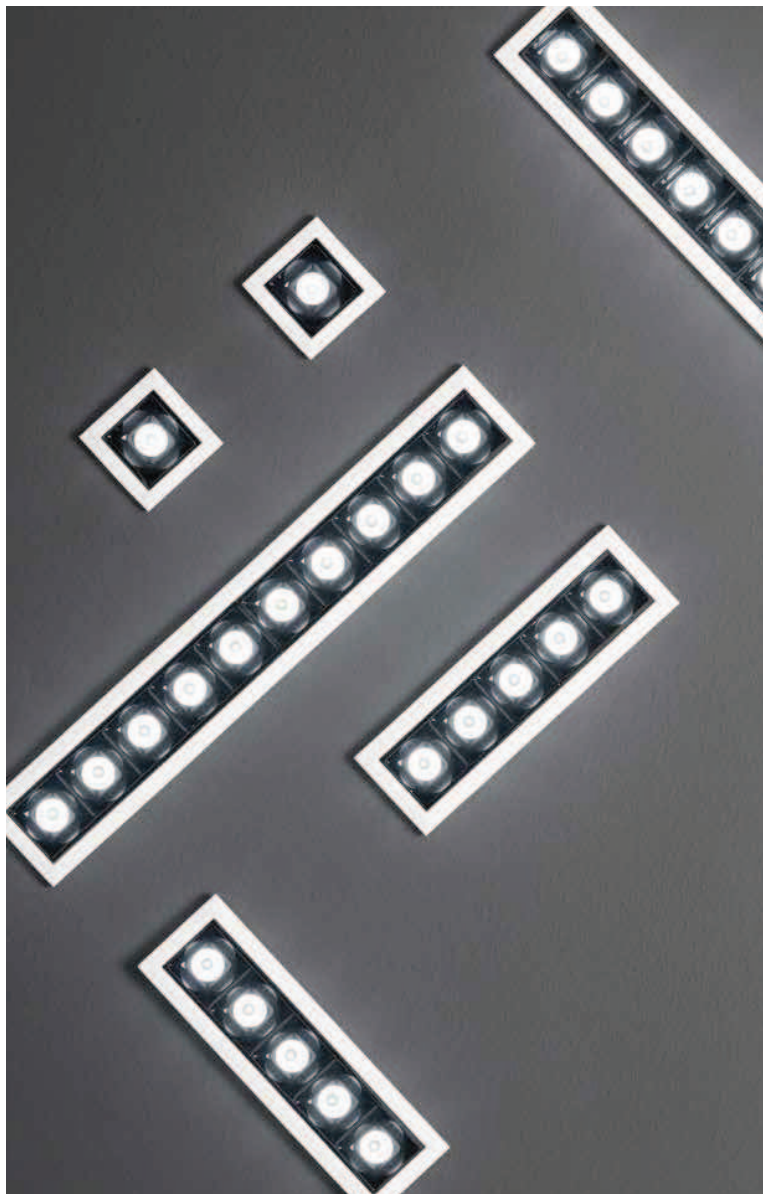

INC-SINKRO-2M
8031440360876
lumen

colour temp. colour
230 lm


watt 2W
beam angle 45°
34 x 34 mm



INC-SINKRO-10M
8031440360890
lumen

colour temp. colour
1130 lm


watt 5 x 2W
beam angle 45°
136 x 34 mm



INC-SINKRO-20M
8031440360906
lumen

colour temp. colour
2260 lm

watt 10 x 2W
beam angle 45°
269 x 34 mm



Fotometria del prodotto / Photometric curve

