

MACK

Faretto da incasso in policarbonato anti
abbagliamento con diffusore bianco e riflettore cromato.
Recessed spotlight in anti-glare polycarbonate
with white diffuser and chromed reflector.



technical information **MACK**



INC-MACK-15C

8031414873913
lumen

colour
temp. colour


1650 lm

INC-MACK-15

8031414867974
lumen

1650 lm

watt 15W
beam angle 75°
Ø 125 mm



INC-MACK-20C

8031414873906
lumen

colour
temp. colour


2500 lm

INC-MACK-20

8031414867981
lumen

2500 lm

watt 20W
beam angle 75°
Ø 160 mm



INC-MACK-25C

8031414873890
lumen

colour
temp. colour


3050 lm

INC-MACK-25


8031414867998
lumen

3050 lm

watt 25W
beam angle 75°
Ø 200 mm



Fotometria del prodotto / Photometric curve

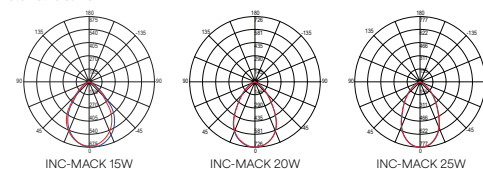

Materiale
PC

Colore
bianco con
riflettore cromato



Temperatura colore
3000K / 4000K



Driver
integrato

Material
PC

Colour
white with
chrome reflector



Colour temperature
3000K / 4000K



Driver
built-in