

ToLEDo Striplight V3 300MM 450LM S14s

Item No: 0028105




LED Striplight replacement for incandescent lamp High lumen output: up to 806lm 15,000 hours average rated life Up to 85% energy saving Creates a warm ambiance similar to traditional lamps Perfect for kitchen, mirror lighting, shaver lighting, bathroom 3 year warranty

Technical Assets

Dimensions (mm)

Photometrics

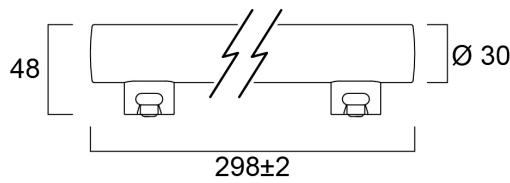

ToLEDo Striplight V3 300MM 450LM S14s

Item No: 0028105



General data

Product name	ToLEDo Striplight V3 300MM 450LM S14s
Technology	LED
Watt (Rated) (W)	5
Cap/Base	S14s
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741150
Warranty	3 years

Optical data

Useful luminous flux (Φuse)	450
Luminous flux (Rated) (lm)	450
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Power consumption (W)	5
Wattage (W)	5
Equivalent watt (W)	35
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	2.4
Inrush Duration (µs)	200
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	460
Max. products per 13A C Breaker	598
Max. products per 16A C Breaker	67
Max. products per 20A C Breaker	920
Max. products per 16A B Breaker	33

Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	298
Nominal Product Diameter (mm)	48
Weight (kg)	0.078

ToLEDo Striplight V3 300MM 450LM S14s

Item No: 0028105



Packaging

Product EAN number	5410288281056
Packaging single length / height (cm)	30.7
Packaging single width (cm)	5.0
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288281053
Units per outer package	6
Packaging outer length / height (cm)	31.3
Packaging outer width (cm)	10.6
Packaging outer depth (cm)	10.1

Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures