



NEW

TRACK LIGHT
ZOOM PLUS



TECHNICAL INDOOR

DECORATIVE

STRIP LED

TECHNICAL OUTDOOR



OUTDOOR



SOLAR

INDUSTRIAL

WORK



SORGENTI

NEW

TRACK LIGHT ZOOM PLUS

ZOOM PLUS è il faro da binario all-in-one che unisce performance e versatilità. Disponibile nelle eleganti finiture bianca o nera, si distingue per la sua ottica zoom regolabile (24°– 60°), la potenza selezionabile fino a 40 W per un output luminoso di 4000 lumen e la possibilità di regolare il colore della luce in base all'atmosfera desiderata. Adattabile a ogni esigenza, consente di modellare l'atmosfera dello spazio in pochi secondi, rendendolo ideale per ambienti retail e commerciali dinamici. Elevata resa cromatica (CRI>90) e comfort visivo garantito (UGR<13).

ZOOM PLUS is an all-in-one track spotlight that combines performance and versatility. Available in elegant white or black finishes, it features an adjustable zoom optic (24°–60°), selectable power up to 40 W for a luminous output of 4000 lumens and the ability to adjust the light color to suit the desired atmosphere. Adaptable to any need, it allows you to shape the space's ambience in seconds, making it ideal for dynamic retail and commercial environments. High color rendering (CRI>90) and guaranteed visual comfort (UGR<13).

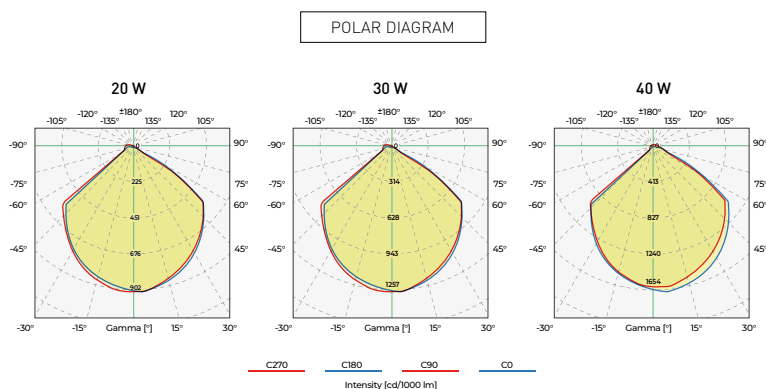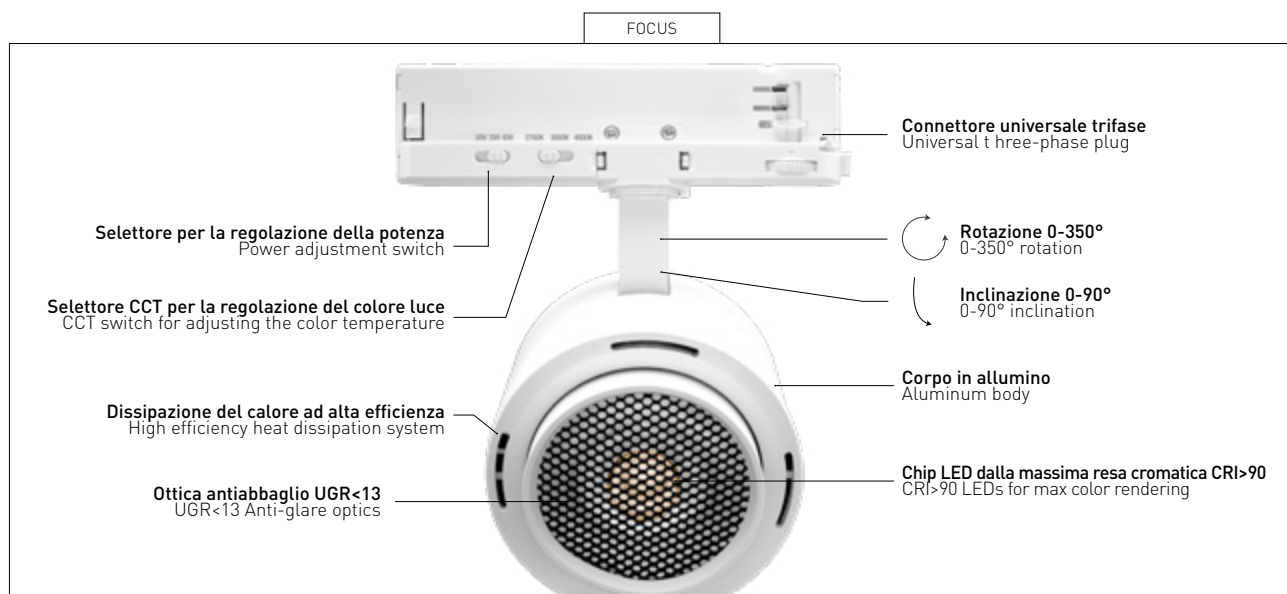

CONICAL DIAGRAM

Illuminance (lx)

	20 W	30 W	40 W	
1 m	195,8	272,5	346,3	
2 m	48,9	68,14	86,5	
3 m	21,7	30,2	38,4	
4 m	12,2	17,1	21,6	
5 m	7,8	10,9	13,8	

EUTRAC 165

195

Ø 110

0-90° 0-350° 826 g

 MULTIWATT		 OUTPUT 90°		 TRICOLOR		
20 W - 30 W - 40 W	4.000 lm	2700 K - 3000 K - 4000 K	White 		ZMP-4090BI NEW	85,00 €
			Black 		ZMP-4090NE NEW	
  EUTRAC 175-265 V IP20 24°-60°  EASY TO INSTALL  MULTIWATT  CCT  ALUMINUM  HONEYCOMB GRID  UGR  CRI  5 YEARS						

Diagram illustrating a three-phase power supply system. The system consists of three phase conductors (A, B, C) and a neutral conductor (N). The phase conductors are labeled with their respective power ratings: 20 W, 30 W, and 40 W. The neutral conductor is labeled WW and NW. The phase conductors are connected to a three-phase supply (2000 V, 50 Hz). The neutral conductor is connected to ground. The diagram also shows a three-phase supply (2000 V, 50 Hz) and a three-phase supply (2000 V, 50 Hz).




DOPPIO SELETTORE PER LA REGOLAZIONE DI POTENZA E TEMPERATURA COLORE LUCE
DOUBLE SELECTOR FOR ADJUSTING POWER AND LIGHT COLOR TEMPERATURE

TECHNICAL NOTES



RUOTABILE SU ASSE 350° - INCLINABILE 90°
ROTATABLE ON AXIS 350° - TILTABLE 90°


HONEYCOMB GRID



UGR<13

**Controllo dell'abbagliamento grazie al
vetro smerigliato e alla griglia a nido d'ape**
Glare control thanks to frosted glass and
honeycomb grid

FOCUS

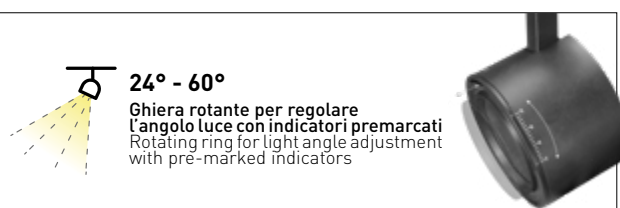

ZOOM LEVELS

