



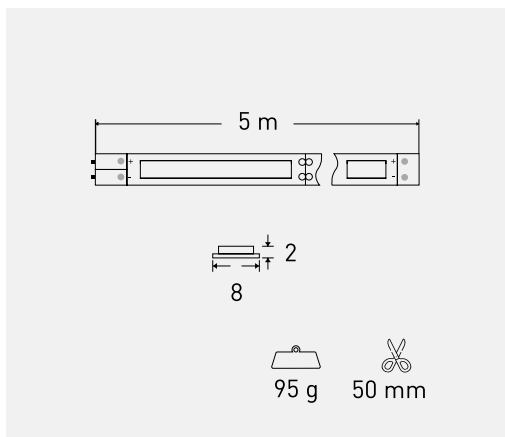

CERTIFICATIONS

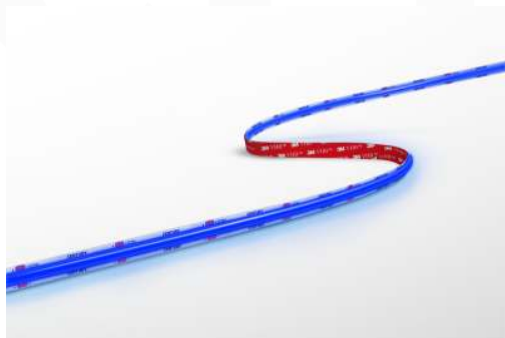

Protection rating (IP)	IP20
Warranty	2 years
Suitable for flammable surfaces	✓

ACCENTO COB RGB

ACOBBL-1048000

GENERAL INFORMATION

Item number	ACOBBL-1048000
EAN code	9090171021844
Source technology	LED
ETIM group	52 - Lighting fixtures
Subgroup code	5223 - Led strip
Line	ACCENTO COB RGB
Model	Blue led strip

LIGHTING DATA

Light color	BLUE K
Beam angle	120°
Number of LEDs per metre	480/m

ELECTRICAL CHARACTERISTICS

Effective power	50 W
Supply voltage	24 V/DC
Current consumption	2.075 mA
Dimmable	✓ Dimmable
Lifetime	25.000 hours
LED module power per metre	10 W/m
Operating temperature	-15 +40°C


MECHANICAL CHARACTERISTICS

Product dimensions	5.000 x 8 x 2 mm
Net weight	95 g
Shape	Strip

REGULATIONS AND DIRECTIVES

Directive 2014/30/UE (EMC)	EN IEC 55015:2019+A1 EN 61547:2009 EN 61000-3-2:2019 EN 61000-3-3:2013+A2
Regulation (UE) 2019/2015 - Energy Label	
Directive 2012/19/UE (RAEE)	

Regulation (UE) 2019/2020 - Ecodesign	
Directive 2011/65/UE (RoHS)	EN IEC 63000:2018 IEC 62321 series

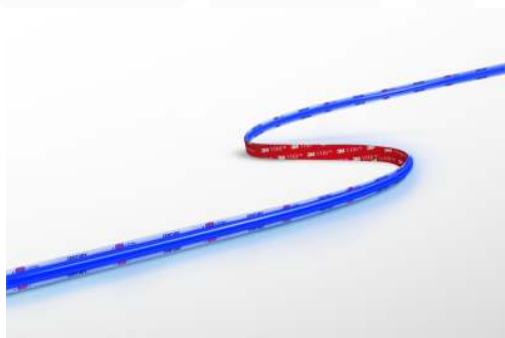

LOGISTICS DATA

Package	Color Box
Package dimensions	135 x 135 x 15 mm
Gross weight	125 g
Inner carton	10 pz
Inner carton dimensions	-
Inner carton weight	-
Master carton	20 pz
Master carton dimensions	195 x 320 x 195 mm
Master carton weight	-

This document is generated automatically and is for indicative purposes only. CENTURY disclaims any liability for errors, omissions or inaccuracies in the document, as well as for any consequences arising from the use of the information it contains.

ACCESSORIES

**KPRAN-1818**
Aluminium profile -
corner**KPRAN-7676B**
Double emission**KPRBS-1468**
Aluminium profile -
skirting board**KPRCA-2711**
Aluminium profile -
walkable**KPRCG-1709**
Standard**KPRCG-1709-ID**
Hydro**KPRCG-1709-ID-L**
Hydro**KPRCG-1709-ID-T**
Hydro**KPRCG-1709-L**
Standard**KPRCG-1709-T**
Standard**KPRCG-5314**
Aluminium profile for
plasterboard - linear**KPRI-2212**
Recessed**KPRI-2508**
Recessed aluminium
profile**KPRI-3011**
Recessed aluminium
profile**KPRI40G-2413**
Recessed aluminium
profile**KPRIC-4736**
Recessed aluminium
profile**KPRS-0809**
Aluminium profile - slim
surface**KPRS-1611**
Aluminium profile -
domed surface**KPRS-1708**
Aluminium profile - flat
surface**KPRS-3537**
Aluminium profile -
suspension**KPRS40G-1713**
Aluminium profile -
surface**KPRSC-6528**
Aluminium profile -
perpendicular light**KPRSC-8050**
Aluminium profile -
oblique light**KPRSL-5709**
Aluminium profile -
ultra-flat**KPRVE-4217**
Aluminium profile - cove